
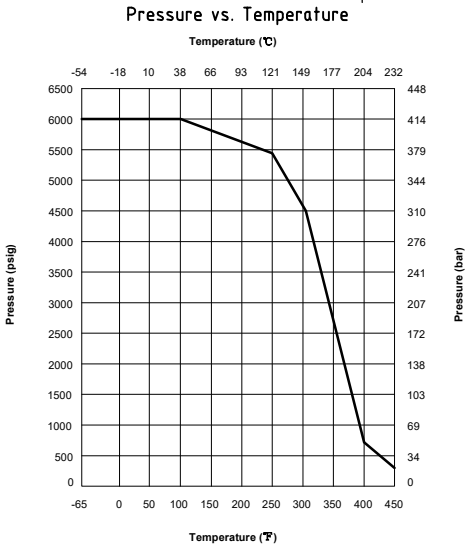


Valve Features	
Maximum working pressure	6000psig
Working temperature	-54℃~232℃
Orifice	0.25in.(6.4mm)
CV	2.34

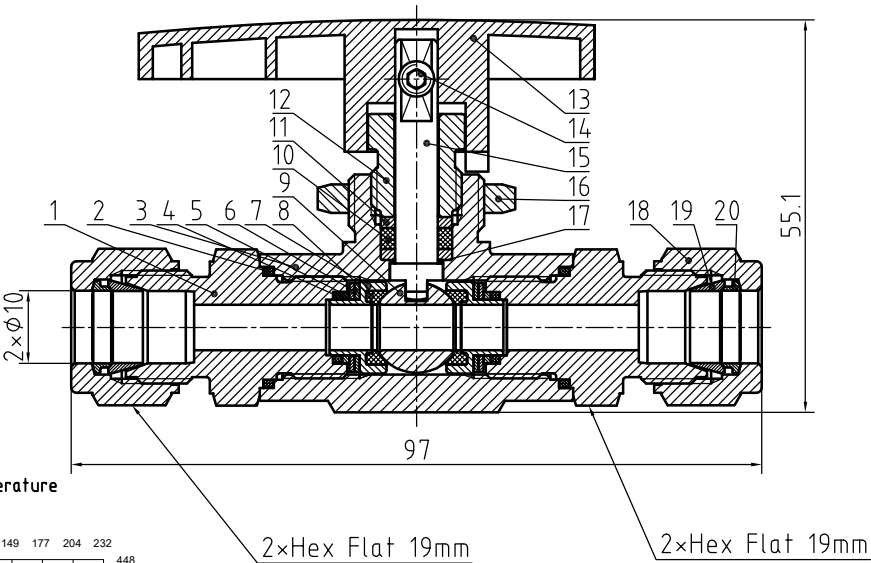

NOTE:Dimensions for reference only.

Item	Component	Material
1	End Connection	316 L/A4 79
2	Connection O-ring	PTFE
3	Body	316 L/A4 79
4	Seat Retainer Backup Ring	PTFE
5	Seat Retainer Guide	316 L/A4 79
6	Seat Spring	Alloy X- 750
7	Seat Retainer	316 L/A4 79
8	Seat	PEEK
9	Ball	316 L/A4 79
10	Stem Packing	PTFE
11	Stem Washer	316 L/A4 79
12	Packing Nut	316 L/A4 79
13	Handle	Carbon steel
14	Set Screw	316 L/A4 79
15	Stem	316 L/A4 79
16	Panel Nut	316 L/A4 79
17	Stem Back-up Ring	PEEK
18	Nut	316 L/A4 79
19	Front Ferrule	316 L/A4 79
20	Rear Ferrule	316 L/A4 79

Linear unit of size: mm			Ball Valve		НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
signature	date				
design			versions	1	proportion 1:1
audit	✓	10.09.2025			BVN9-2B-D-10M-PK-S
ratify					
			Page 1/1		