


Valve Features	
Set pressure	50-350psig
Max inlet pressure	6000psig
Max Allowable outlet pressure	1500psig
Working temperature	-4℃~121℃
Orifice	3.6mm

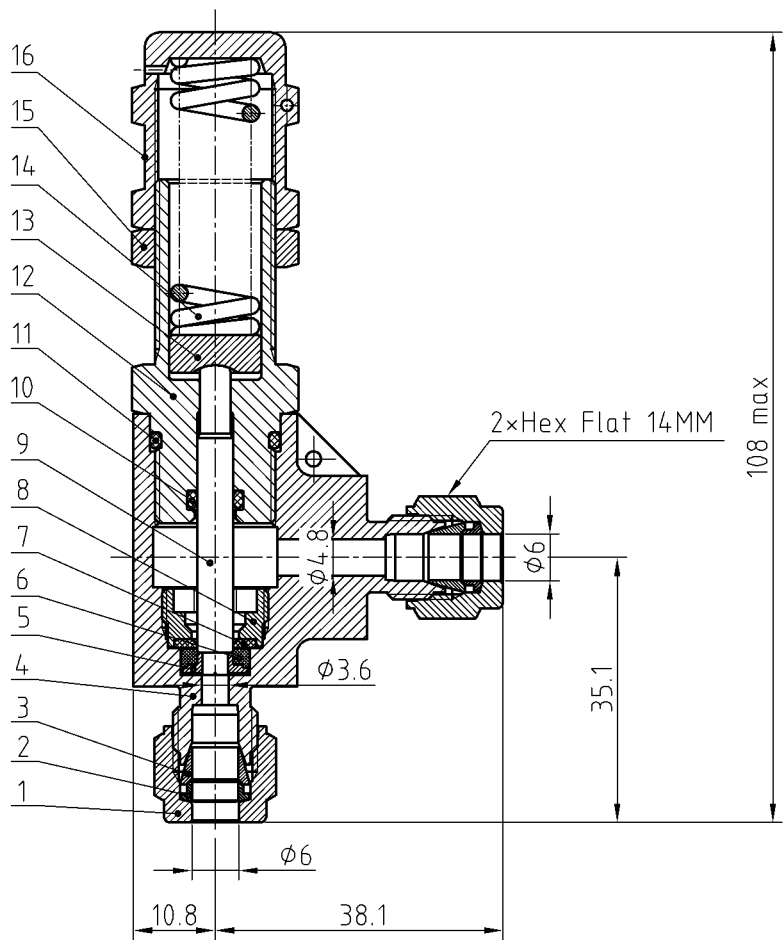

IDX	Designation	Materials
1	Nut	316 L/A4 79
2	Rear Ferrules	316 L/A4 79
3	Front Ferrules	316 L/A4 79
4	Body	316 L/A182
5	Seat	316 L/A4 79
6	O-ring	FKM
7	Gasket	PEEK
8	Seat Retainer	316 L/A4 79
9	Stem	316 L/A4 79
10	O-ring	FKM
11	O-ring	FKM
12	Bonnet	316 L/A4 79
13	Spring Support	316 L/A4 79
14	Spring	S17700 SS/AMS 5678
15	Lock Nut	316 L/A4 79
16	Bonnet Cap	316 L/A4 79

NOTE:Dimensions for reference only.

Linear unit of size: mm			Proportional Relief Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit			  Page 1/1			RVN1-2-D-6M-S/A
ratify						